

**JDI-17PK Pump Kit**  
**For Model JDI-17PLP Low-Profile Drain**


# Installation Instructions

1. Attach the hose connector (**No. 7**) to the discharge side of the electric pump.
2. To the inlet side of the electric pump attach the 1/2' hose barb (**No. 6**).
3. Install the hose pump to the base plate as shown in Figure 1 using the four (4) 1/4" nuts and bolts provided.
4. Attach one end of the 1/2" x 8" drain hose (**No. 4**) to the 3/8" barbed fitting on the drain body. Secure it with a hose clamp.
5. Attach the other end of the 1/2" x 8" drain hose to the barbed fitting on the inlet side of the pump - securing with a hose clamp.
6. Install one end of the 1/2" x 10' (**No. 3**) drain hose to the discharge side of the pump.
7. On the opposite end of the discharge hose attach the 1/2" ball valve.

*If the pump kit was purchased with the drain - proceed to Step 7 of the oil drain assembly instructions.*

## PARTS LIST

| Item No. | Description               | Qty. | Item No. | Description                   | Qty. |
|----------|---------------------------|------|----------|-------------------------------|------|
| 1.       | Electric Pump             | 1    | 5.       | Hose Clamp                    | 2    |
| 2.       | Pump Mounting Hardware    | 4    | 6.       | Hose Barb Fitting 1/2" x 3/8" | 1    |
| 3.       | Discharge Hose 1/2" x 10' | 1    | 7.       | Hose To Pipe Connector 1/2"   | 1    |
| 4.       | Drain Hose 1/2" x 8"      | 1    | 8.       | Ball Valve 1/2" (Not Shown)   | 1    |

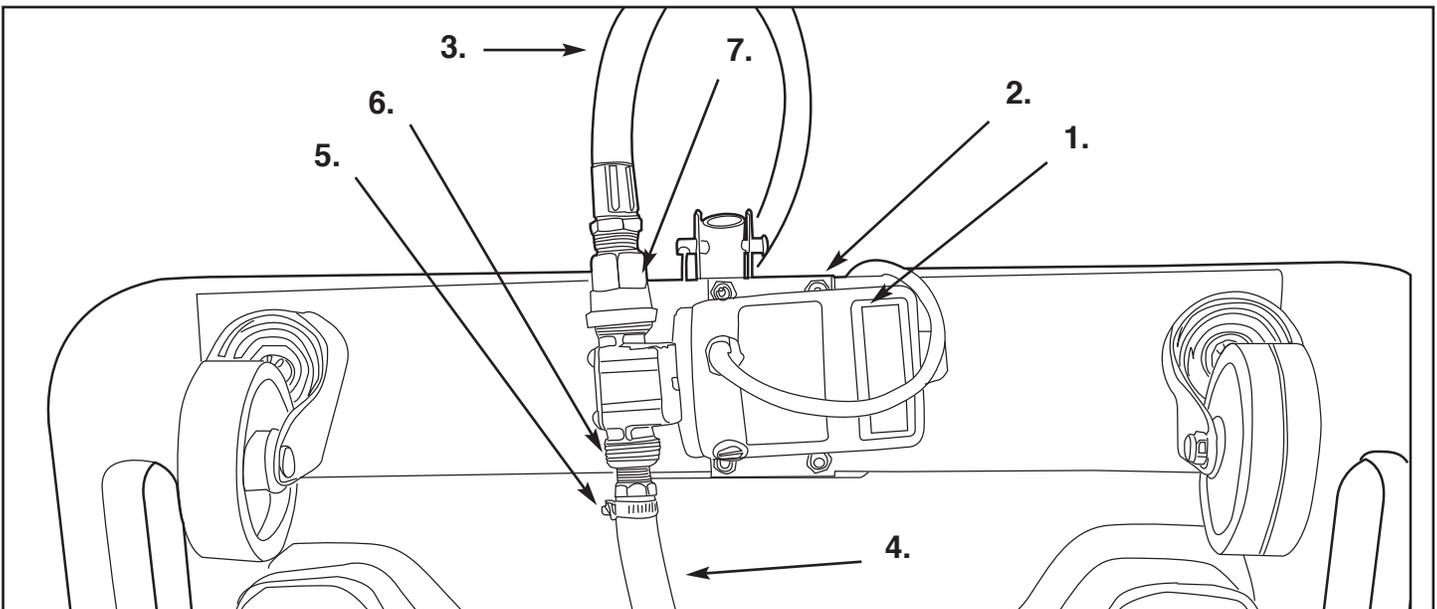

IMPORTANT - Always keep 1/2' ball valve on the end of the discharge hose closed until you are ready to empty the tank.

**Electric Pump is not self lubricating. DO NOT RUN PUMP DRY!**

### To Empty The Drain -

- Position the drain next to the used fluid container.
- Put discharge hose into the container and open the 1/2" ball valve.
- Plug the electric pump into a 110v outlet to start
- When empty, unplug the pump and close the ball valve.

When transporting the drain keep the electric cord and discharge hose attached to the handle using the brackets provided on the handle.