

T.O.M.C.A.T. T.O.M.C.A.T.

AIR-ASSISTED MULTIPLE CAMBER ADJUSTMENT TOOL

SERVICE EQUIPMENT

TC-614

Makes camber adjustment a one-man job. Works on many GM and Chrysler vehicles using a two-bolt lower strut mount. Inflatable air bladder fits between tire and strut for easy controlled adjustment of camber settings.




Includes

- 2' air hose and air bladder
- Air control valve for inflating and controlled deflating
- Safety relief valve to prevent overflowing
- Weight: 2 lbs.

Easy-To-Use

- With strut mount bolts loosened, place the T.O.M.C.A.T. between the tire and strut.
- Inflate the T.O.M.C.A.T. to push the wheel to a positive camber position.
- To adjust the camber, slowly release air from the T.O.M.C.A.T. until the wheel retracts to the specified alignment setting.
- Tighten the bolts and the adjustment is done.

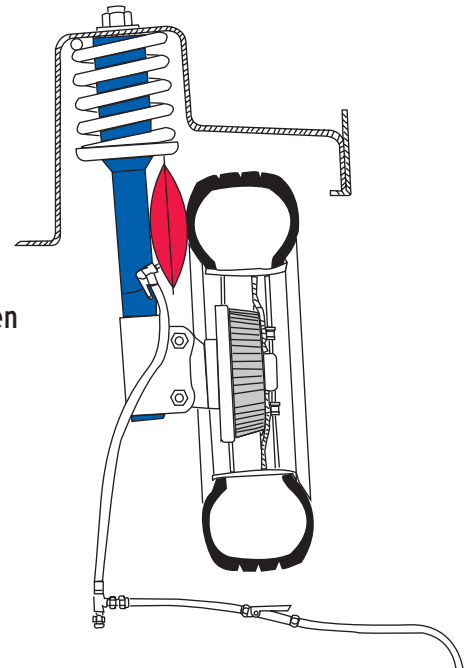

JD JohnDow™ Industries

151 Snyder Avenue • Barberton, OH 44203
Toll-Free: 800-433-0708 • Fax: 330-753-6419
Website: www.johndow.com • Email: customerservice@johndow.com